

CEMENT  
BACKER  
UNITS  
OVER MTL  
STUDS

WALL  
MEMBRANE  
LAP OVER  
SHOWER  
MEMBRANE

2x2 UNGLAZED WALL  
TILE SHOWER  
SURROUND

**NOTE:**

INSTALL SHOWER WALLS TO MEET THE REQUIREMENTS OF THE TILE COUNCIL OF AMERICA, METHOD W244. INSTALL SHOWER FLOOR TO MEET THE REQUIREMENTS OF THE TILE COUNCIL OF AMERICA, METHOD B415.

SHOWER MEMBRANE,  
CARRY ALL AROUND  
SHOWER UNDER  
ENTIRE FLOOR  
AND UP WALL 1'-0"

1" - 1 3/4" MINIMUM REINFORCED  
MORTAR BED, SLOPE 1/4" PER FOOT


2x2 UNGLAZED FLOOR TILE

WEEP  
HOLES  
SHOWER  
DRAIN

CONC FLOOR  
SLAB, SLOPE 1/4" PER FT

CRUSHED  
TILE OR  
STONE

**SHOWER SECTION**

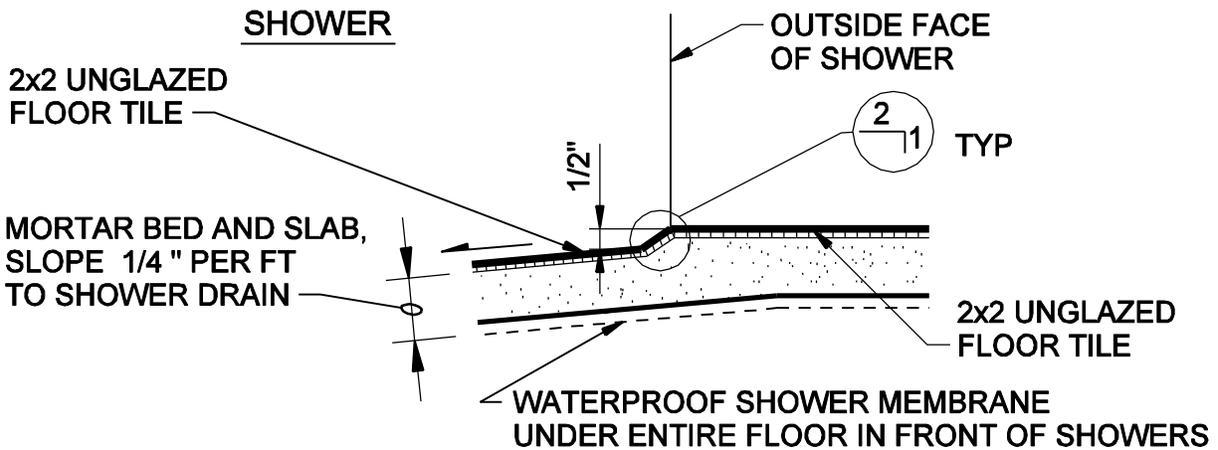

**SHOWER CURB DETAIL**

**SHOWER STALL**

NTS

EASTERN MUNICIPAL WATER DISTRICT  
PERRIS II DESALINATION FACILITY

0931-100